


+

THREADED & FSW ENDS						
VALVE SIZE	MAT'L	DIMENSIONS, INCHES			WT. lbs.	
		A	B	C		D
1/2 & 3/4	DI/BRZ	3.62	5.25	2.18	5.00	10
	CS/SS	3.65	5.25	2.18	5.00	10
1	DI/BRZ	4.12	5.50	2.62	5.00	12
	CS/SS	4.12	5.50	2.62	5.00	13
1 1/4	DI/BRZ	4.12	5.50	2.62	5.00	12
1 1/2	DI/BRZ	4.50	5.75	2.62	5.00	13
	CS/SS	4.65	6.00	2.75	5.00	14
2	DI/BRZ	4.50	5.87	2.62	5.00	15
	CS/SS	5.50	6.12	3.00	5.00	18

FLANGED END						
VALVE SIZE	ANSI FLANGE	DIMENSIONS, INCHES			WT. lbs.	
		A	B	C		D
1/2"	150#	7.25	5.25	2.18	5.00	12
	300#	7.50	5.25	2.18	5.00	14
3/4"	150#	7.25	5.25	2.18	5.00	14
	300#	7.62	5.25	2.18	5.00	16
1"	150#	7.25	5.50	2.62	5.00	16
	300#	7.75	5.50	2.62	5.00	19
1 1/4"	150#	7.87	5.50	2.62	5.00	16
	300#	8.37	5.50	2.62	5.00	20
1 1/2"	150#	8.75	6.00	2.75	5.00	25
	300#	9.25	6.00	2.75	5.00	26
2"	150#	10.00	6.12	3.00	5.00	29
	300#	10.50	6.12	3.00	5.00	32

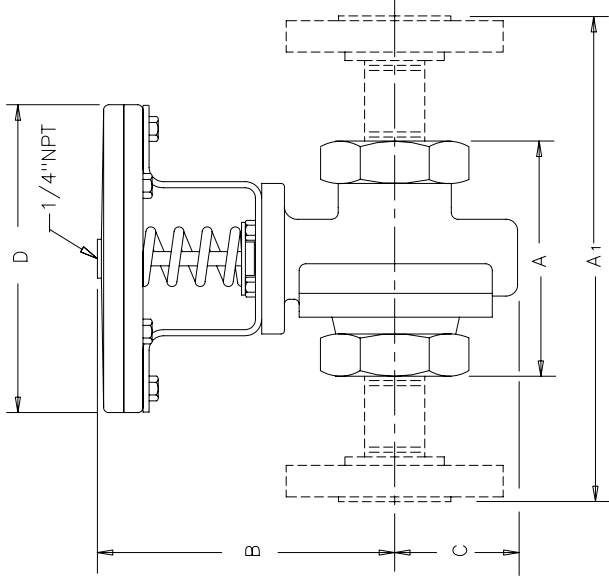

SPECIFICATION DATA

CUSTOMER _____
 ORDER No. _____ SERIAL No. _____
 TAG No. _____
 VALVE TYPE _____ QTY. _____
 BODY _____
 END CONN. _____
 INLET PRESS. _____ MAX. Δ P _____
 CONTROL RANGE _____
 VALVE ACTION: RISE IN SIGNAL TO OPEN CLOSE
 VALVE SEAT _____ Cv _____
 MISC. _____
 CERTIFIED _____ DATE _____

 RICHARDS INDUSTRIES
 CINCINNATI, OHIO
 U.S.A.

VALVE GROUP

FN: MK76

1/2-2" MK76
 ON-OFF CONTROL VALVE

DRAWN BY	DATE
JLA	7/22/96
CHECKED BY	DATE

MK76

+