



VERTICAL CROSS SECTION

SEE DETAIL 1

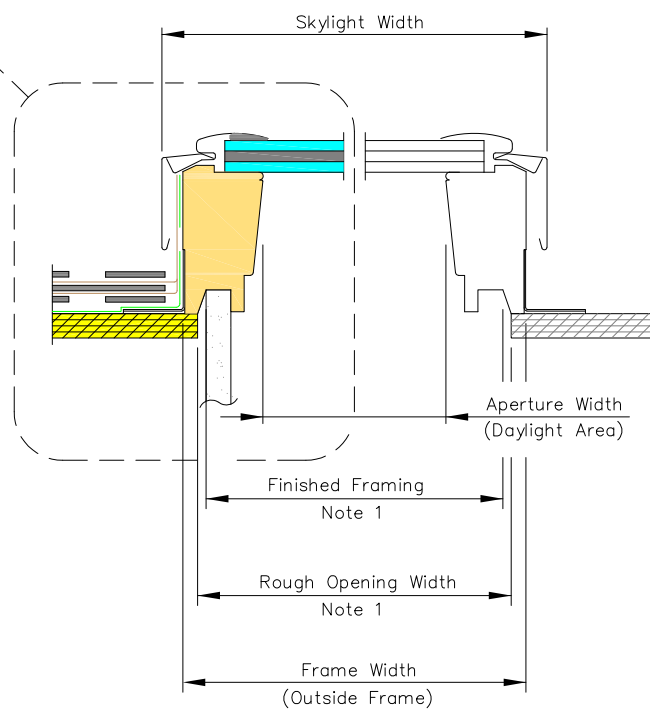

HORIZONTAL CROSS SECTION

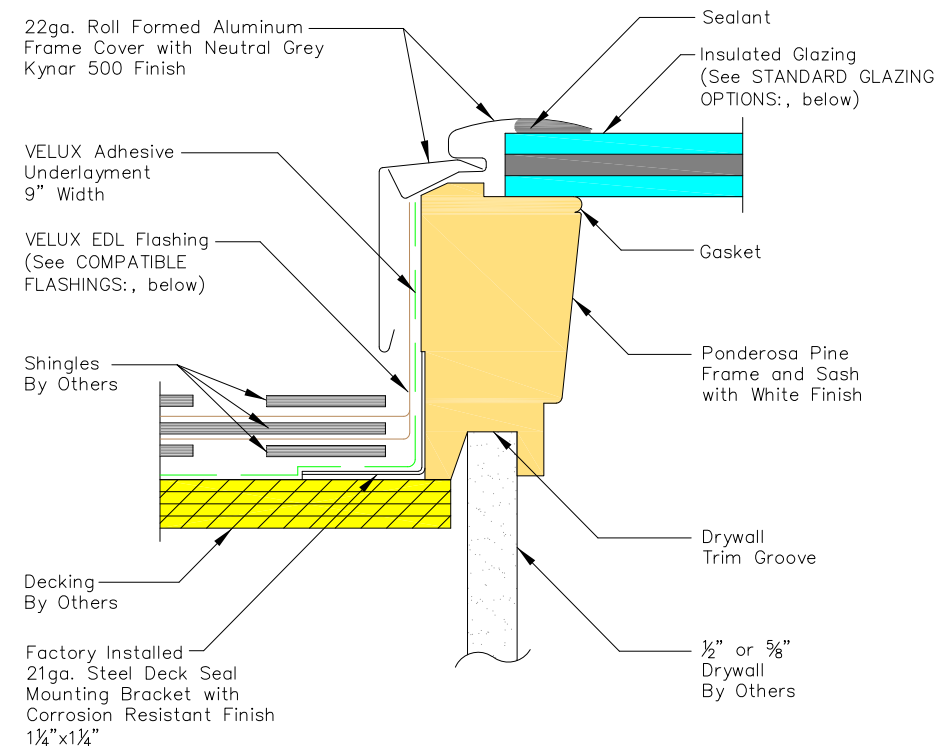

DETAIL 1

PRODUCT DIMENSIONS

METRIC UNITS (MILLIMETERS)

Size	Rough Opening Width	Frame Width	Frame Aperture Width	Skylight Width	Rough Opening Height	Frame Height	Frame Aperture Height	Skylight Height	Daylight Area (Sq. Meters)
A06	368	387	303	409	1162	1175	1091	1200	.333
C01	533	546	462	568	682	695	611	720	.282
C04	533	546	462	568	962	975	891	1000	.412
C06	533	546	462	568	1162	1175	1091	1200	.504
C08	533	546	462	568	1382	1395	1311	1420	.606
C12	533	546	462	568	1784	1797	1713	1822	.792
D26*	572	590	506	612	582	599	511	620	.259
D06*	572	590	506	612	1162	1175	1091	1200	.552
M02	763	776	692	798	762	775	691	800	.486
M04	763	776	692	798	962	975	891	1000	.617
M06	763	776	692	798	1162	1175	1091	1200	.754
M08	763	776	692	798	1382	1395	1311	1420	.909
S01	1123	1136	1052	1158	682	695	611	720	.644
S06	1123	1136	1052	1158	1162	1175	1091	1200	1.148

IMPERIAL UNITS (INCHES)

Size	Rough Opening Width	Frame Width	Frame Aperture Width	Skylight Width	Rough Opening Height	Frame Height	Frame Aperture	Skylight Height	Daylight Area (Sq. Feet)
A06	14 1/2	15 1/4	11 15/16	16 1/8	45 3/4	46 1/4	42 15/16	47 1/4	3.56
C01	21	21 1/2	18 3/16	22 3/8	26 7/8	27 3/8	24 1/16	28 3/8	3.04
C04	21	21 1/2	18 3/16	22 3/8	37 7/8	38 3/8	35 1/16	39 3/8	4.43
C06	21	21 1/2	18 3/16	22 3/8	45 3/4	46 1/4	42 15/16	47 1/4	5.43
C08	21	21 1/2	18 3/16	22 3/8	54 7/16	54 15/16	51 5/8	55 15/16	6.52
C12	21	21 1/2	18 3/16	22 3/8	70 1/4	70 3/4	67 7/16	71 3/4	8.52
D26*	22 1/2	23 1/4	19 15/16	24 1/16	22 15/16	23 7/16	20 1/8	24 7/16	2.78
D06*	22 1/2	23 1/4	19 15/16	24 1/16	45 3/4	46 1/4	42 15/16	47 1/4	5.94
M02	30 1/16	30 9/16	27 1/4	31 7/16	30	30 1/2	27 3/16	31 1/2	5.15
M04	30 1/16	30 9/16	27 1/4	31 7/16	37 7/8	38 3/8	35 1/16	39 3/8	6.64
M06	30 1/16	30 9/16	27 1/4	31 7/16	45 3/4	46 1/4	42 15/16	47 1/4	8.13
M08	30 1/16	30 9/16	27 1/4	31 7/16	54 7/16	54 15/16	51 5/8	55 15/16	9.77
S01	44 1/4	44 3/4	41 7/16	45 9/16	26 7/8	27 3/8	24 1/16	28 3/8	6.92
S06	44 1/4	44 3/4	41 7/16	45 9/16	45 3/4	46 1/4	42 15/16	47 1/4	12.36

STANDARD GLAZING OPTIONS:

- Laminated LowE3 (04)
- Tempered LowE3 (05)
- Impact (06)
- Snowload (10)

*Tempered Exterior Pane used with all options

COMPATIBLE FLASHINGS:

- EDL Step flashing
- EKL/EKX Combi flashing
- EDW Tile flashing
- EKW/EKX Combi tile flashing
- EDM Metal roof flashing
- ECB Counter flashing for curbs

* BUILDER SERIES SKYLIGHT

NOTES:
1. The ROUGH OPENING and FINISHED FRAMING dimensions are based on perpendicular interior finish material on all four sides and these dimensions will vary depending on the roof construction, the thickness and the design of the interior finish material.



VELUX
1418 Evans Pond Road
Greenwood, SC 29649
1-800-88-VELUX
www.VELUXUSA.com

FS - Fixed Skylight